

**DECORATIVE
LIGHTING
COMPANY**

www.decolight.com.au

SLIM LINE WASH LIGHT

24 volt 48 WATT RGB



Size : L 1000mm x 60mm x 60 mm

Input : DC 24 volt

Power Output : 48 Watt (24 x 3watt)

Diode type : 3 in one diffuse lens

Led angle : 60 degree

Bracket type: stainless L shape

Rating : IP65 for indoor / outdoor use




Colour control

transformer



Connectable slim wash lights





**DECORATIVE
LIGHTING
COMPANY**

www.decolight.com.au

SLIM LINE WASH LIGHT

24 volt 48 WATT RGB



Power supply 24 v



Colour controller




Extension leads



Simple connectable
System to create wash
Effects anywhere

Accessories
Power supplies
Colour controllers
Extension leads






**DECORATIVE
LIGHTING
COMPANY**


www.decolight.com.au

SLIM LINE WASH LIGHT 24 volt 48 WATT RGB

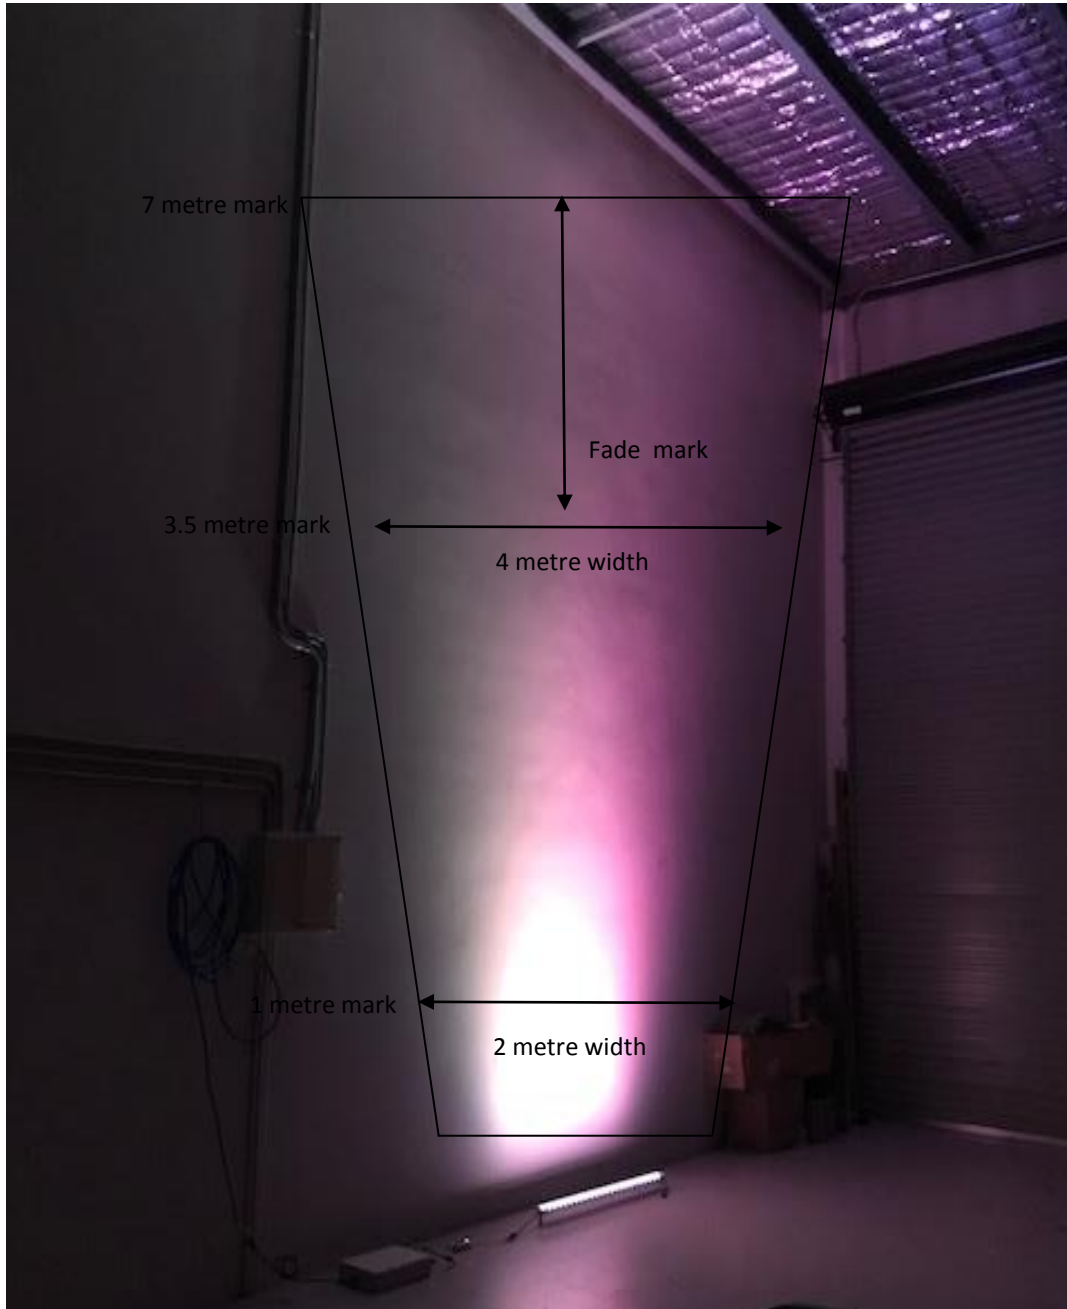

Illustrated is a single 48 watt wash unit showing maximum output in a white colour mode
The fade area begins at a 3.5 metre height to the ceiling .





**DECORATIVE
LIGHTING
COMPANY**

www.decolight.com.au

SLIM LINE WASH LIGHT

24 volt 48 WATT RGB

Applications include:

Architectural lighting

Linear Flood light

Disco light

Wall washing

For examples : bars, clubs, stages, parks, plazas, commercial buildings, galleries, Historical buildings, churches, landscapes, events.

Features :

High power LED 24 volt DC.

1000 mm x 60mm x 60mm

RGB or RGBWW, single colour units

Diffused diodes 3 in one or 4 in one types

Different beam angles for various applications

Slim aluminium housing

Adjustable stability stainless leg brackets

High efficient aluminium heat sync system

DMX compatible or Digital colour controllable system

4 pin male / female connectors

IP 65 rated

(Units require a 24 volt transformer and colour control unit to function, configuration will vary depending on application)

Slim 1033 Top View & Size View

